


## **INSTALLATION INSTRUCTIONS**

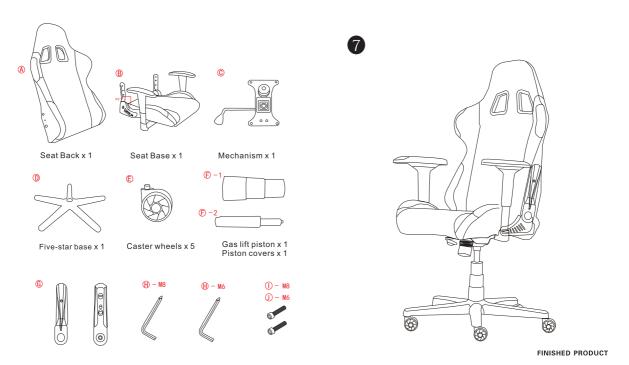

ATTENTION • Please make sure the angle of the adjuster on the seat base is set at 90 degrees (As shown in Figure B)

## **INSTALLATION INSTRUCTION**

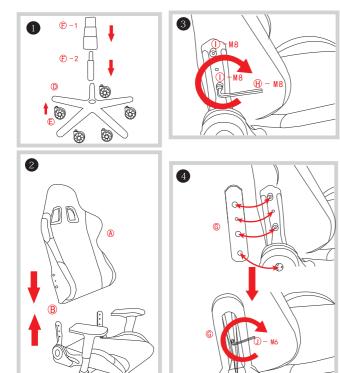






- 1. Install the casters wheels, gas lift piston and piston covers onto the star base.
- 2. Put seat back onto the seat base.
- 3. Take out the m8 screws and use m8 allen key to fix the seat back onto the seat base.
- 4. Keep the hole sites on the recliner covers aligned with M8 screws, Fix the plastic cover with M6 screws.
- 5. Mount the mechanism underneath the seat base using 4 x m8 screws. (The screws have been tightened underneath the seat base. please pay attention to the direction of the mechanism and make sure the handle is on the right side.)
- 6. Insert the gas lift piston onto the notch of the mechanism.

## INSTALLATION INSTRUCTIONS



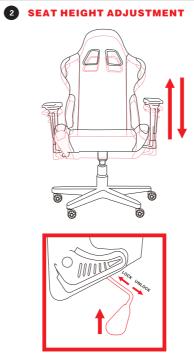



leftwards and rightwards.

frontwards and backwards.

Press button (3) and pull the armrest

Lower the seat: sit down on the seat and lift up the handle, seat will lower down automatically. Lift the seat: stand up and pull up the handle, it goes back automatically. Lock back posture: pull the handle towards the


left.

Unlock back posture: pull the handle towards the right.

## Attentions:

- 1. Please do not use the chair for other purposes.
- 2. There may be risk of overturn when standing on the chair or use it as a ladder, please be careful.
- 3. Put a soft cushion under it when installing, in case of any damage to the floor.
- 4. Please use it on the flat surface in case of turnover .
- 5. The product is only for a single person use.
- 6. It might be dangerous to move the chair with goods on it, please be careful.
- 7. There may be risk of catching fire with inflammables around the chair, please note that.
- 8. Keep away from direct sunlight.
- 9. Prohibited use of chair in fire or damp environment.
- 10. Use a soft dry cloth to clean the chair.
- 11. If there are stains hard to remove, use a mild detergent, dilute it to 2% degree with hot water, then wipe the seat with a soaked cloth, after that wipe it again with a dry cloth.
- 12. Prohibited dismantling of gas spring.
- 13. Other cautions are also described in the instruction, please read it careful.







Please don't push the head part when lying flat on the chair