


**EVEREST EWR-523N2  
REPEATER MODU  
KURULUM  
DÖKÜMANI  
(2017 TARİHLİ ÜRÜN İÇİN)**

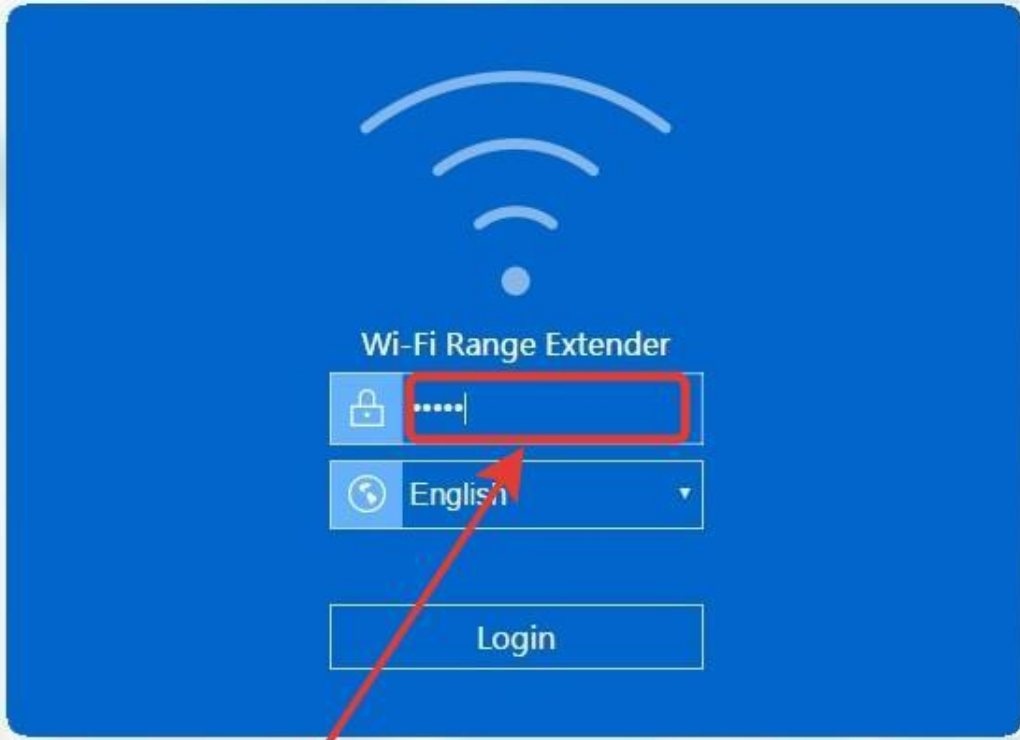

Wi-Fi Range Extender

.....

English

Login

The image shows a blue login interface for a Wi-Fi Range Extender. At the top is a white Wi-Fi signal icon. Below it, the text "Wi-Fi Range Extender" is displayed. There are three main input areas: a password field with a lock icon and a red rectangular highlight around it, a language dropdown menu currently set to "English", and a "Login" button at the bottom. A red arrow points from the text box below to the password field.

Giriş şifresi olarak "admin" yazıp "Login" butonuna basın.



This Device

Router



DSL Modem

Speed



0KB/S ↑

0KB/S ↓

Clients



1

Internet



Disconnect

Device Information

WAN Type	Router	Wi-Fi SSID	Wireless-N
Device IP	192.168.10.1	Channel	Auto
WAN IP	0.0.0.0	UpTime	00h:02m
DNS1	0.0.0.0	Firmware	M23N_V3130.0216
DNS2	0.0.0.0		
WAN MAC	80:3F:5D:67:00:EC		

"Wizard" menüsüne basın.



Status



Wizard



Wi-Fi



Setup

## Wizard



### Repeater



The Device is copies and reinforces the existing wireless signal to extend the coverage of the signal. This mode is fit for large house, office, warehouse or other spaces where the existing signal is weak.



### AP



The device is connected to a wired network and then converted to a wired internet access to the wireless network which can be shared by multiple devices.



### Router



This device is connected to a DSL or Cable modem and works as an ordinary wireless router.

"Repeater" seçeneğini seçin.



Status



Wizard



Wi-Fi



Setup



## Repeater Wizard

Connect to:

Wi-Fi Password:

Repeater SSID:

Connect

Select a Wi-Fi

Manually enter

	IP-COM_AP375_0	<input type="radio"/>
	SLink	<input type="radio"/>
	Segment	<input type="radio"/>
	WLAN	<input type="radio"/>
	Segment	<input type="radio"/>

Bu bölümden bağlanmak istediğiniz ağı işaretleyin.

Status

Wizard

Wi-Fi

Setup



## Repeater Wizard

Connect to:

Segment

Wi-Fi Password:

Repeater SSID:

Segment\_EXT

Connect

Select a Wi-Fi

Manually enter

	IP-COM_AP375_0	<input type="radio"/>
	SLink	<input type="radio"/>
	Segment	<input checked="" type="radio"/>
	WLAN	<input type="radio"/>
	Segment	<input type="radio"/>

Seçtiğiniz modemın Wi-Fi şifresini yazın ve "Connect" butonuna basın.



Status



Wizard



Wi-Fi



Setup




## Repeater Wizard

**:-) Please wait a few seconds!**

For the wireless connection, you have to reconnect to this device after the current setting is complete. Then click "Back" button to go to the login page for further settings. For the wired connection, you could Click "Back" button to go to the login page directly after the current setting is complete.

SSID : Segment\_EXT

Password: Segment2003

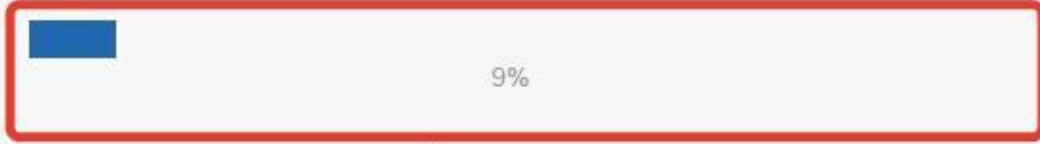

%100'e kadar yükleme işlemi sürecektir.



Status



Wizart



Wi-Fi



Setup



## Repeater Wizard

**:-) Please wait a few seconds!**

For the wireless connection, you have to reconnect to this device after the current setting is complete. Then click "Back" button to go to the login page for further settings. For the wired connection, you could Click "Back" button to go to the login page directly after the current setting is complete.

SSID : Segment\_EXT

Password: Segment2003



%100 yükleme işlemi tamamlandıktan sonra alt bölüme "Back" butonu çıktığı zaman kurulum tamamlanmış olacaktır. Sayfayı kapatabilirsiniz.



Status



Wizard



Wi-Fi



Setup